
Satellite Products and Services Review Board

Algorithm Theoretical Basis Document

VIIRS Fractional Snow Cover Map Product



Version 1.0
November, 2015

TITLE: ALGORITHM THEORETICAL BASIS DOCUMENT: VIIRS FRACTIONAL SNOW
COVER PRODUCT

AUTHOR:

Peter Romanov (NOAA-CREST, City University of New York)

TABLE OF CONTENTS

	<u>Page</u>
LIST OF TABLES AND FIGURES	6
1. INTRODUCTION.....	7
1.1. Product Overview.....	8
1.1.1. Product Description	8
1.1.2. Product Requirements.....	8
1.2. Satellite Instrument Description.....	9
2. ALGORITHM DESCRIPTION	10
2.1. Processing Outline.....	10
2.2. Algorithm Input	10
2.3. Theoretical Description	12
2.3.1. Physical Description	14
2.3.2. Mathematical Description	19
2.4. Algorithm Output	19
2.5. Performance Estimates.....	21
2.5.1. Test Data Description.....	21
2.5.2. Sensor Effects	21
2.5.3. Retrieval Errors.....	21
2.6. Practical Considerations.....	24
2.6.1. Numerical Computation Considerations.....	24
2.6.2. Programming and Procedural Considerations	24
2.6.3. Quality Assessment and Diagnostics	24
2.6.4. Exception Handling.....	28
2.7. Validation.....	28
3. ASSUMPTIONS AND LIMITATIONS.....	28
3.1. Performance Assumptions	28
3.2. Potential Improvements	29
4. REFERENCES.....	31

LIST OF TABLES AND FIGURES

	<u>Page</u>
Table 1-1 – VIIRS Binary Snow Cover product requirements	8
Table 2-1 – Primary sensor input to Binary Snow Cover algorithm	10
Table 2-2 – Derived VIIRS products used by the Fractional Snow Cover algorithm	11
Table 2-3 – Input static datasets used by the Fractional Snow Cover algorithm	11
Figure 2-1– Spectral reflectance of natural surfaces and clouds.....	12
Figure 2-2– Geographical regions where VIIRS observations were collected to characterize the reflectance of snow-free and snow covered land surface.....	15
Figure 2-3– Satellite-observed visible (band 1) reflectance of snow cover (left) and snow-free land surface (right) as a function of the solar and satellite zenith angle. Observations included in the statistics were made across the principle plane at the solar-satellite relative azimuth angle within 60 deg to 120 deg.	16
Table 2-4 – Kernel functions and corresponding kernel loads for the reflectance anisotropy model of snow cover and snow-free land surface.	16
Figure 2-3– Top of the atmosphere visible reflectance of snow cover (left) and snow-free land surface (right) as a function of solar and satellite zenith angle simulated with the developed kernel-driven model.	17
Figure 2-4– Landsat snow fraction and matching MODIS NDSI scatter plots reproduced from Salomonson and Appel (2003)	18
Figure 2-5– Example of VIIRS granule false color images (upper), NDSI-based snow cover fraction (middle) and reflectance-based snow cover fraction (lower). November 11, 2013	20
Figure 2-6– Example of global gridded maps of NDSI-based snow fraction (left) and reflectance-based snow fraction (right)	20
Table 2-5- Factors contributing to the uncertainty of the derived reflectance-based snow fraction.	22
Table 2-6 - Factors contributing to the NDSI-based snow fraction uncertainty.....	23
Figure 2-7– Time series of correlation between the snow fraction and forest fraction distribution for two snow fraction products, NDSI-based and reflectance-based.....	26
Figure 2-8– Time series of correlation between the snow fraction and in situ observed snow depth over US Great Plains and Canadian Prairies in January and February 2014.....	27

1. INTRODUCTION

Snow and ice cover are among the key Earth's surface characteristics influencing radiation budget, energy exchange between the land surface or ocean and the atmosphere, and water balance. Information on the spatial extent and distribution of snow and ice cover presents an important input to numerical weather prediction (NWP), hydrological and climate models. Satellites present one of important sources of information on snow. High spatial resolution, wide area coverage and short revisit time allow for efficient, spatially detailed monitoring of both seasonal and perennial snow cover over the globe.

Although the albedo of pure snow may exceed 0.9, the albedo of natural snow-covered surfaces rarely reaches such high values. First, the snow pack, particularly during the snowmelt may develop a patchy pattern which brings down the reflectance of the mixed surface. Second, snow cover is often littered by vegetation debris or masked by the canopy. Because of these factors only a portion of the snow covered area may be directly exposed to the atmosphere and thus contributes to the reflective properties of the land surface. To properly account for fractional feature of the snow cover and for the masking effect of the vegetation when estimating the reflective properties of the land surface and in particular, its albedo, information on the snow cover fraction is needed.

The Visible Infrared Imaging Radiometer Suite (VIIRS) onboard current SNPP and future JPSS satellites provides routine daily observations of the Earth's surface in the visible, shortwave infrared, middle infrared and far infrared spectral bands. This combination of available spectral bands provides a good potential for using VIIRS observations in the automated snow cover identification and mapping. Observations from VIIRS are available at high, up to 375m spatial resolution which allows for a detailed characterization of the snow cover distribution on the ground surface. Besides a simple binary snow cover classification where every pixel is flagged as either snow covered or snow free, these observations provide potentials for estimating the portion of the pixel affected by the snow cover and thus to derive a subpixel snow cover fraction.

This document presents the description of the VIIRS Fractional Snow Cover product and the algorithm used to generate this product from the VIIRS data.

1.1. Product Overview

1.1.1. Product Description

The VIIRS Fractional Snow Cover Map Product (or Snow Fraction) characterizes the portion of the ground surface covered with snow as it is seen from the satellite. In other words, the derived parameter represents the “viewable snow fraction” which accounts both for the patchy structure of the snow pack and for the masking of the snow cover by the tree canopy. The snow cover fraction is estimated with two different algorithms. The first algorithm as adopted from MODIS and assumes a linear relationship between the snow fraction and the Normalized Difference Snow Index (NDSI). The second algorithm assumes that the snow fraction is linearly related to the visible reflectance of the land surface. This approach has been applied to GOES Imager and METOP AVHRR data. As similar technique incorporating observations in multiple reflective spectral bands has been implemented in the GOES-R ABI data processing system. Implementation of the two algorithms with VIIRS data provides an opportunity to generate snow fraction estimates comparable both with all current and historic snow fraction products.

The snow cover fraction is derived at the imagery (~375m) spatial resolution in clear sky conditions (no clouds) during daytime. Besides the fractional snow cover maps, the product includes a quality flags file which provides support information on the quality of snow fraction retrievals. The VIIRS Fractional Snow Map products are delivered in NetCDF format.

1.1.2. Product Requirements

The requirements specified for the VIIRS Fractional Snow Cover product are provided in [Reference] and are summarized in Table 1-1. VIIRS fractional snow cover is derived in clear sky conditions during daytime (at less than 85 degree solar zenith angle). Retrievals are performed at 375m spatial resolution and should be made at the accuracy of at least 10%.

Table 1-1 – VIIRS Binary Snow Cover product requirements

Name	Geographic Coverage	Horizontal Res.	Mapping Accuracy	Measurement Range	Measurement Uncertainty	Product Measurement Precision	Temporal Coverage Qualifiers	Cloud Cover Conditions Qualifier
Snow Cover Fraction	Global	375m	1 km	Snow cover fraction (0 - 100%)	10% of the FSC area	10%	Sun at 85 degree solar zenith angle	Clear sky conditions

1.2. Satellite Instrument Description

The Visible Infrared Imaging Radiometer Suite (VIIRS) onboard SNPP and future JPSS satellites is a multiband imaging instrument designed to support the acquisition of high-resolution atmospheric imagery and generation of a variety of applied environmental products characterizing the Earth's, atmosphere, oceans, land surface and cryosphere. VIIRS provides spectral observations within 412 nm to 12 μ m in 16 bands at moderate spatial resolution of (~750 m at nadir), in a broadband optical moderate resolution day and night band (DNB) and high spatial resolution imagery at ~375 m in nadir in 5 spectral bands centered in the visible, near infrared, shortwave infrared, middle infrared and far infrared spectral range. [Visible Infrared Imaging Radiometer Suite (VIIRS) Sensor Data Record (SDR) User's Guide, NOAA Technical Report NESDIS 142, Washington D.C., 10 September, 2013, online at http://www.star.nesdis.noaa.gov/smcd/spb/nsun/snpp/VIIRS/VIIRS_SDR_Users_guide.pdf]

As the satellite orbits the Earth, VIIRS scans a swath with the width of about 3040 km. This allows for a complete coverage of the Earth's surface at least two times a day, on ascending and descending node. Observations data are delivered in granules of ~85 seconds long which cover the area of ~3040 by ~570 km in size. The SNPP and JPSS equator crossing time is about 1:30 local time.

2. ALGORITHM DESCRIPTION

This section presents the detailed description of the algorithms to generate the Fractional Snow Cover product.

2.1. Processing Outline

The VIIRS Fractional Snow Cover algorithms and products provide estimates of the snow cover fraction as seen by the satellite instrument (“viewable snow fraction”). The derived snow fraction does not account for the snow cover masked by the forest canopy and is therefore different from the true fraction of the snow cover on the ground.

The primary input to the algorithm consists in the VIIRS Binary Snow Cover Map product, VIIRS imagery resolution data in bands I1 and I3 and information on the VIIRS observation geometry. The snow fraction retrieval algorithm will be applied on a pixel-by-pixel basis to pixels labeled as “snow covered” by the Binary Snow Cover Map. Cloudy pixels and water pixels as identified in the quality flags of the VIIRS Binary Snow Cover Map will be excluded from retrievals.

Both snow fraction algorithms are on-step algorithms utilizing a linear unmixture approach with two end-members corresponding to snow free and completely snow covered land surface. The MODIS-heritage NDSI-based snow fraction converts NDSI into the snow fraction using a linear relationship with fixed slope and intercept parameters. The latter is equivalent to an implicit assumption of fixed end-member values. The reflectance-based algorithm will also assume fixed values for the snow-free and fully snow-covered land surface however these values are corrected with respect to a particular satellite-solar geometry of observations.

2.2. Algorithm Input

The Fractional Snow Cover algorithm input includes sensor and ancillary input data. The ancillary data include both VIIRS-derived data and static datasets.

Table 2-1 provides information on the primary sensor input to the algorithm. At this time as the input the algorithm uses VIIRS observations in the visible and shortwave infrared spectral bands (I1 and, I3). In the future modifications of the algorithm possible application of the near-infrared (I2) and middle infrared spectral band data (I4) is assumed. Additional sensor input data include Latitude, Longitude of the pixel along with the observation geometry characterized by the Solar Zenith Angle, Satellite View Angle and Solar-Satellite Relative Azimuth. Observation geometry angles are specified for each VIIRS pixel.

Table 2-1 – Primary sensor input to Binary Snow Cover algorithm

VIIRS Band	Spectral Range (μm)	Nominal Central Wavelength (μm)	Nadir HSR (m)	Similar medium resolution (750m) VIIRS bands	Input Type
I1	0.600-0.680	0.640	375	M5	Current
I3	1.580-1.640	1.61	375	M10	Current

Besides the sensor inputs, the Fractional Snow Cover algorithm uses the Binary Snow Cover map as an input. Properties of the derived VIIRS products used by the Fractional Snow Cover Maps are provided in Table 2-2.

Table 2-2 – Derived VIIRS products used by the Fractional Snow Cover algorithm

VIIRS Product	Nadir HSR (m)	Input Type
Binary Snow Cover	375	Current

Input static datasets include coefficients defining the relationship between the NDSI and snow fraction for the NDSI-based snow fraction algorithms and coefficients defining the BRDF model for snow and for the snow –free land surface. The list of Input static data sets and their description is given in Table 2-3

Table 2-3 – Input static datasets used by the Fractional Snow Cover algorithm

Name	Description	Dimension
NDSI-based Snow Fraction model parameters	Two coefficients defining the linear relationship between NDSI and Snow Fraction	2
Reflectance-based Snow Fraction model parameters	Kernel loads for the snow and snow-free land surface kernel-driven BRDF models	(2,8)

2.3. Theoretical Description

Estimation of a sub-pixel snow cover fraction is based on a strong difference between spectral reflectance of snow and of the snow-free land surface. In the visible to near-infrared spectral range (0.6 -0.9 μm) snow increases the land surface reflectance from 0.05 to 0.4 typical for bare soils and snow-free vegetated surfaces to up to 0.8- 0.9 corresponding to the reflectance of the pure snow. In the shortwave infrared (at wavelengths longer than 1.6 μm) the reflectance of snow is smaller than the reflectance of most land surface cover types (see Figure 2-1). These differences allow not only for identification of the snow cover within the instrument field of view but also for estimating the fraction of the instrument footprint covered with snow or the fractional snow cover.

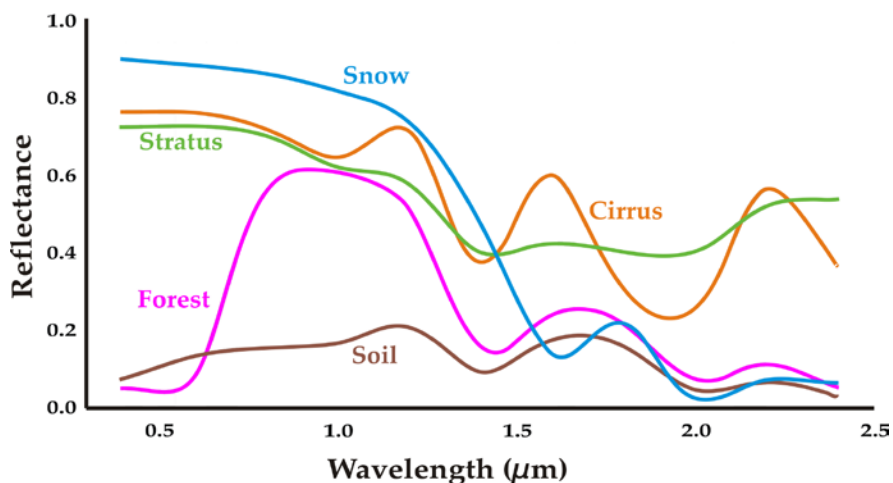


Figure 2-1– Spectral reflectance of natural surfaces and clouds

In the existing snow fraction retrieval algorithms the snow fraction within the image pixel is typically estimated within a linear mixture approach. In this approach the spectral response of a “mixed” pixel is represented as the sum of responses of every land cover type or end-member, weighted by their respective area proportion in the instrument field of view. The primary difference between various snow fraction retrieval techniques concerns the selection of the spectral bands and particular spectral features used in the retrievals along with the selection of end-members and approaches to determine their spectral features.

The majority of developed snow fraction algorithms relate the subpixel snow fraction to the observed reflectance of the scene. Rosenthal and Dozier [1996] derived the snow fraction from Landsat TM-observed reflectance with an unsupervised linear unmixing technique and end-members determined from the image data. Manually selected end-members including multiple end-members representing snow cover with different grain size were utilized by Nolin et al. [1993] to analyze “mixed” pixels in the imagery acquired with the Airborne Visible/Infrared Imaging Spectrometer (AVIRIS). Vikhamar and Solberg [2003] developed a method to retrieve the snow fraction over a forested area. In this work the reflectance spectra of end-members (snow cover and different forest cover types) was determined using a physically based model along with the results of in situ surface reflectance measurements. Painter et al (2009) developed a multispectral multi-end-member snow fraction algorithm which was tested with MODIS data. As input the algorithm needs atmospherically corrected normalized reflectance values. A similar algorithm has been proposed for and incorporated in the GOES-R ABI data processing system. A less sophisticated one-band algorithm has been developed in Romanov et al (2003) and applied to GOES Imager data. The latter technique uses observations in the visible spectral band and two end-members representing completely snow covered and snow free land surface. The algorithm incorporates a kernel-driven BRDF model correcting the end-member reflectance for changing the view and illumination geometry of observations.

In several studies rather than the reflectance the snow fraction is assumed proportional to the value of the Normalized Difference Snow index (NDSI). Barton et al. [2000] applied this approach to Landsat TM data. A similar technique was developed by Appel and Salomonson [2002] for the Moderate Resolution Imaging Spectroradiometer (MODIS) on board EOS satellites. In the latter study the statistical relationship between the snow fraction and NDSI was established through comparing MODIS scenes with coregistered classified images from Landsat TM. The NDSI-based algorithm has been implemented into operational processing of MODIS data and has been used to derive the fractional snow cover from the MODIS instruments since early 2000s.

All algorithms listed above estimate the viewable snow fraction, which characterizes the fraction of snow cover within the instrument footprint which is “seen” by the sensor. The snow fraction defined this way does not account for the snow cover masked by the vegetation. A more challenging approach of Metsämäki et al (2005) accounts for the masking effect of the forest canopy and infers the true snow cover fraction on the ground. Application of this technique however requires a detailed accurate characterization of the forest cover transmissivity which is not readily available and which may be changing with the season.

Due to the use of different spectral bands and different spectral features in the existing algorithms estimates of the snow fraction may be substantially different. In particular large differences between the NDSI-based snow fraction and reflectance-based snow fraction

derived from MODIS data have been reported by Ritger et al., (2013)]. However establishing which algorithm provides a more realistic characterization of the viewable snow fraction is difficult because of the lack of in situ observations of this parameter. Estimates of the snow fraction can be tested for consistency with other environmental datasets (e.g., the forest cover fraction), however these tests do not provide estimates of the absolute accuracy of the product.

For JPSS VIIRS it was decided to incorporate two snow fraction algorithms and corresponding snow fraction products. One algorithm was the heritage NDSI-based algorithm similar to the one implemented with MODIS (Salomonson and Appel, 2003) and another one is a single-band reflectance-based algorithm similar to the one of Romanov et al, (2003). Incorporating two algorithms allows for providing snow fraction estimates comparable both with the currently available MODIS snow fraction and the snow fraction which will be derived from the future GOES-R ABI sensor data.

2.3.1. Physical Description

Reflectance-based Snow Fraction

The reflectance-based snow fraction algorithm for JPSS VIIRS inherits the principal approach to the snow fraction estimate incorporated in the snow fraction algorithm developed earlier for GOES Imager data (Romanov et al., 2003). It uses observations the VIIRS spectral band I1 centered at around 0.6 μ m and applies a linear unmixing technique to determine the snow-covered portion of a scene within the instrument field of view. The two end-members incorporated in the algorithm represent correspondingly a completely snow covered and completely snow free land surface.

$$\text{SnowFractionRefl} = (R - R_{\text{land}}) / (R_{\text{snow}} - R_{\text{land}}), \quad (1)$$

Where **R** is the observed VIIRS band I 1 reflectance of the scene, **R_{snow}** and **R_{land}** are the VIIRS band I1 reflectance of end-members representing the snow-free and the snow-covered land surface, respectively.

It is important that the reflectance of both end-members exhibits a strong angular anisotropy which has to be accounted for when inferring the snow fraction from satellite data. For the JPSS VIIRS snow fraction retrievals **R_{land}** and **R_{snow}** along with the reflectance anisotropy inherent to the snow-free and snow-covered land surface were determined empirically. The reflective properties of a completely snow-covered land surface were established from observations over ice fields in Central Greenland, whereas bidirectional reflectance of snow-free land was determined from the analysis of summer-time observations over North America middle and high latitude area (see Fig 2-2 for

the location of the two regions). To establish the end-member reflectance values VIIRS SNPP clear sky observations in band I1 centered at around 0.6 μm were collected during two the six months periods from March 2013 to September 2013 and from March 2014 to September 2014. Pixels identified as “snow-covered in the VIIRS Binary Snow cover maps product were excluded from the snow-free land dataset. When determining the reflectance of the snow-free land surface no distinction was made between surfaces with different vegetation cover type.

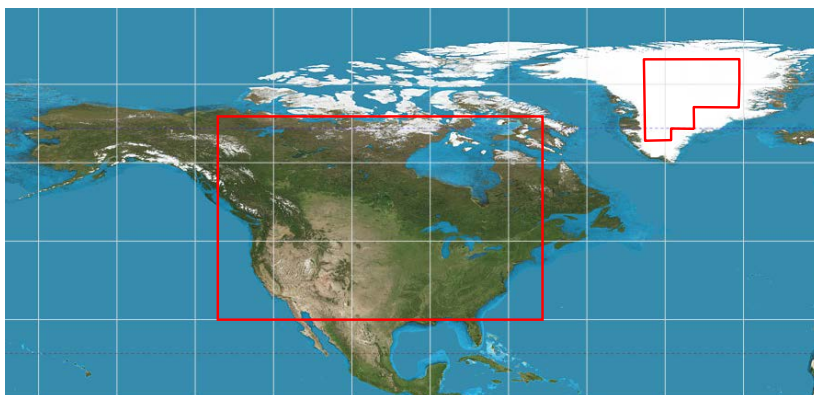


Figure 2-2– Geographical regions where VIIRS observations were collected to characterize the reflectance of snow-free and snow covered land surface

The analysis of VIIRS SNPP observation geometries has shown that in the middle and high latitudes observations are performed far away from the principal plane geometry with the solar-satellite relative azimuth ranging within 60 to 120 deg. Since for natural land surface cover types reflectance does not change much with changing relative azimuth when observations are made across the principle plane geometry, azimuthal variations of snow and land reflectance were disregarded and the observed reflectances were averaged across all relative azimuth angles. Graphs in Figure 2-3 illustrate changes of the observed snow and snow-free land reflectance with solar and satellite zenith angle.

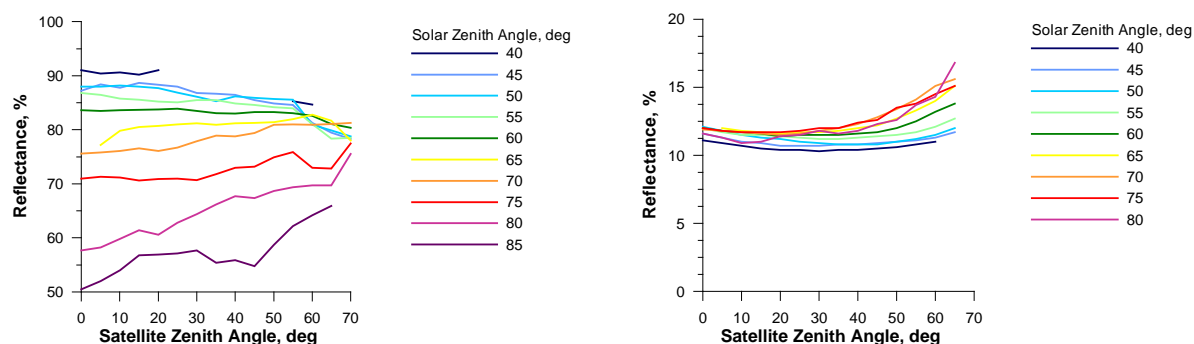


Figure 2-3– Satellite-observed visible (band 1) reflectance of snow cover (left) and snow-free land surface (right) as a function of the solar and satellite zenith angle. Observations included in the statistics were made across the principle plane at the solar-satellite relative azimuth angle within 60 deg to 120 deg.

To reproduce the reflectance anisotropy of snow and snow-free land surface in the snow fraction retrieval algorithm we have tested several kernel-driven models incorporating different combinations of trigonometrical functions of the solar and satellite zenith angles. The intent was to establish the model yielding the closest fit to the observed reflectance at all angles with the least number of kernel functions used. The following 8-term parameterization was found to most optimally satisfy the objective:

$$\mathbf{R} = \mathbf{C}_0 + \sum_{i=1,7} \mathbf{C}_i \mathbf{F}_i \tag{2}$$

where $\mathbf{F}_1 \dots \mathbf{F}_7$ are kernel functions having the form $\mathbf{F}_1 = \cos(\theta_{sol})$, $\mathbf{F}_2 = \cos(\theta_{sat})$, $\mathbf{F}_3 = \cos(\theta_{sol}) \cos(\theta_{sat})$, $\mathbf{F}_4 = \cos^2(\theta_{sol})$, $\mathbf{F}_5 = \cos^2(\theta_{sat})$, $\mathbf{F}_6 = \cos^4(\theta_{sol})$, $\mathbf{F}_7 = \cos^4(\theta_{sat})$ and $\mathbf{C}_0 \dots \mathbf{C}_7$ are corresponding kernel loads. The kernel loads were estimated within a simple least-square approach and are given in Table 2-4. Graphs illustrating the reflectance anisotropy of snow cover and snow-free land provided by the developed model are given in Figure 2-3.

Table 2-4 – Kernel functions and corresponding kernel loads for the reflectance anisotropy model of snow cover and snow-free land surface.

Kernel Functions	Kernel Loads	Kernel Load Values	
		Snow-free land	Snow
1.	C_0	19.02	63.45
$\cos(\theta_{sol})$	C_1	9.699	89.90
$\cos(\theta_{sat})$	C_2	-9.944	-16.33
$\cos(\theta_{sol}) \cos(\theta_{sat})$	C_3	13.16	61.81
$\cos^2(\theta_{sol})$	C_4	-36.30	-140.9
$\cos^2(\theta_{sat})$	C_5	-6.289	-5.114
$\cos^4(\theta_{sol})$	C_6	20.18	51.62
$\cos^4(\theta_{sat})$	C_7	5.419	-2.623

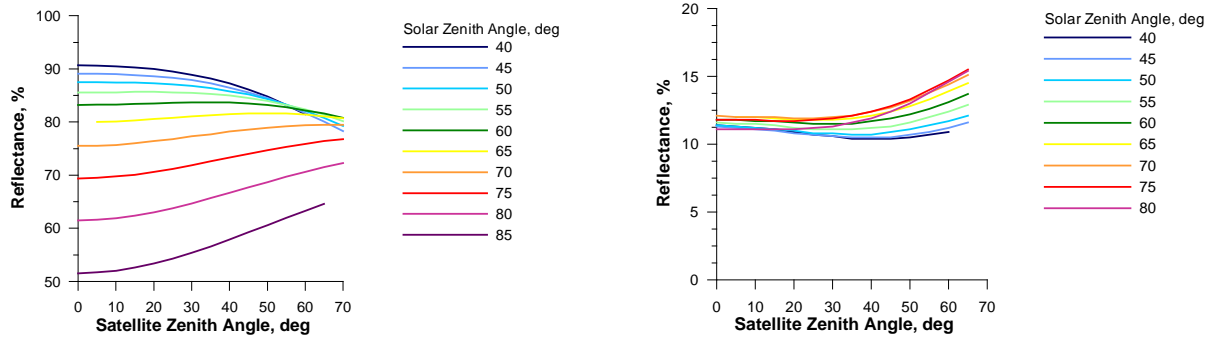


Figure 2-3– Top of the atmosphere visible reflectance of snow cover (left) and snow-free land surface (right) as a function of solar and satellite zenith angle simulated with the developed kernel-driven model.

Application of the developed BRDF model has allowed to substantially reduce variation in the observed visible reflectance of snow and of the snow-free land due to the reflectance anisotropy. In particular variation of about 40% inherent to the original top of the atmosphere snow reflectance and of about 7% in the observed reflectance of the snow-free land surface decreases correspondingly to 6-7% and 2% in the anisotropy-corrected reflectances.

The kernel loads of the reflectance anisotropy model for snow and for the snow-free land surface are designed to be tunable parameters that maybe updated as a result of prelaunch tuning and on-orbit calibration and validation.

NDSI-based Snow Fraction

The Normalized Difference Snow Index (NDSI) is widely used to identify snow cover in the field of view of satellite radiometers. NDSI is a spectral index expressed as

$$\text{NDSI} = \frac{R_{\text{vis}} - R_{\text{swir}}}{R_{\text{vis}} + R_{\text{swir}}}, \quad (3)$$

where R_{vis} and R_{swir} are the observed reflectances in the visible and in the shortwave infrared spectral band.

Salomonson and Appel (2003) compared MODIS-based NDSI with the higher spatial resolution snow retrievals with Landsat data and established that the snow fraction is

related to NDSI. Figure 2-4 presents several example of NDSI and snow fraction scatter plots for a number of scenes reproduced from the paper cited above.

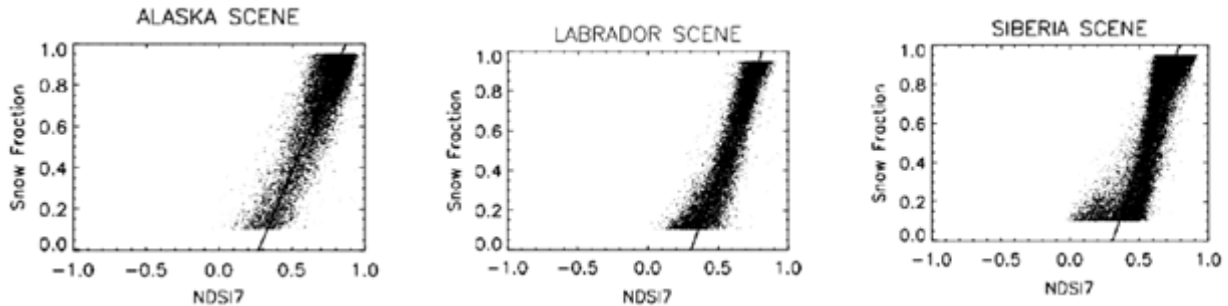


Figure 2-4– Landsat snow fraction and matching MODIS NDSI scatter plots reproduced from Salomonson and Appel (2003) .

It was proposed to use approximate the relationship with a linear function of the form

$$\text{SnowFractionNDSI} = a + b \cdot \text{NDSI}, \quad (4)$$

Where **NDSI** is the satellite-observed NDSI value

The best match between the snow fraction and NDSI was achieved with $a = -0.01$ and $b = 1.45$.

The NDSI-based snow fraction formula is equivalent to a linear unmixture algorithm

$$\text{SnowFractionNDSI} = (\text{NDSI} - \text{NDSI}_{\text{land}}) / (\text{NDSI}_{\text{snow}} - \text{NDSI}_{\text{land}}), \quad (5)$$

where $\text{NDSI}_{\text{land}} = 0.007$ and $\text{NDSI}_{\text{snow}} = 0.70$

For VIIRS the value of NDSI is calculated from observations in bands I1 centered at in the visible spectral range at $0.6 \mu\text{m}$ and I3 centered in the shortwave infrared spectral range at around $1.6 \mu\text{m}$.

The NASA MODIS team has tested the MODIS snow fraction algorithm with VIIRS data and found that the optimal values of a and b for VIIRS are the same as for MODIS (G.Riggs, personal communication).

The slope and intercept coefficients **a** and **b** in Formula (4) are designed to be tunable parameters that maybe updated as a result of prelaunch tuning and on-orbit calibration and validation.

2.3.2. Mathematical Description

Implemented algorithms follow their description provided in Section 2.3.1 and are applied on a pixel-by-pixel basis. Once the pixel is confirmed as “clear sky” and “snow covered”, the two snow fraction algorithms are applied sequentially.

The reflectance-based algorithm calculates the reflectance of end-members adjusted for the given observation geometry using Formula (2) and then applies Formula (1) to determine the fractional snow cover.

The NDSI-based algorithm uses VIIRS observations in bands I1 and I3 to calculate the value of NDSI using Formula (3) and then applies Formula (4) to determine the fractional snow cover within the instrument field of view.

2.4. Algorithm Output

The algorithm output includes:

- Fractional Snow Cover Map derived with the Reflectance-based approach
- Fractional Snow Cover Map derived with the NDSI based approach
- The Quality Flags associated with the map
- Metadata
 - Total number of pixels on which retrieval attempted
 - Number of pixels which are cloud free
 - Number of confidently snow pixels
 - Number of rejected snow pixels based on various tests (snow climatology, temperature climatology, spatial consistency, and temperature uniformity)

The fractional snow cover maps and the quality flags present the arrays of the size corresponding to the size of the VIIRS granule. The output is provided in NetCDF format.

Figure 2-5 gives an example of granules of the two VIIRS snow fraction products. Figure 2-6 provides an example of a daily global snow fraction map generated from all snow fraction granules produced in the course of one day.

VIIRS granule: 20131111_1933578

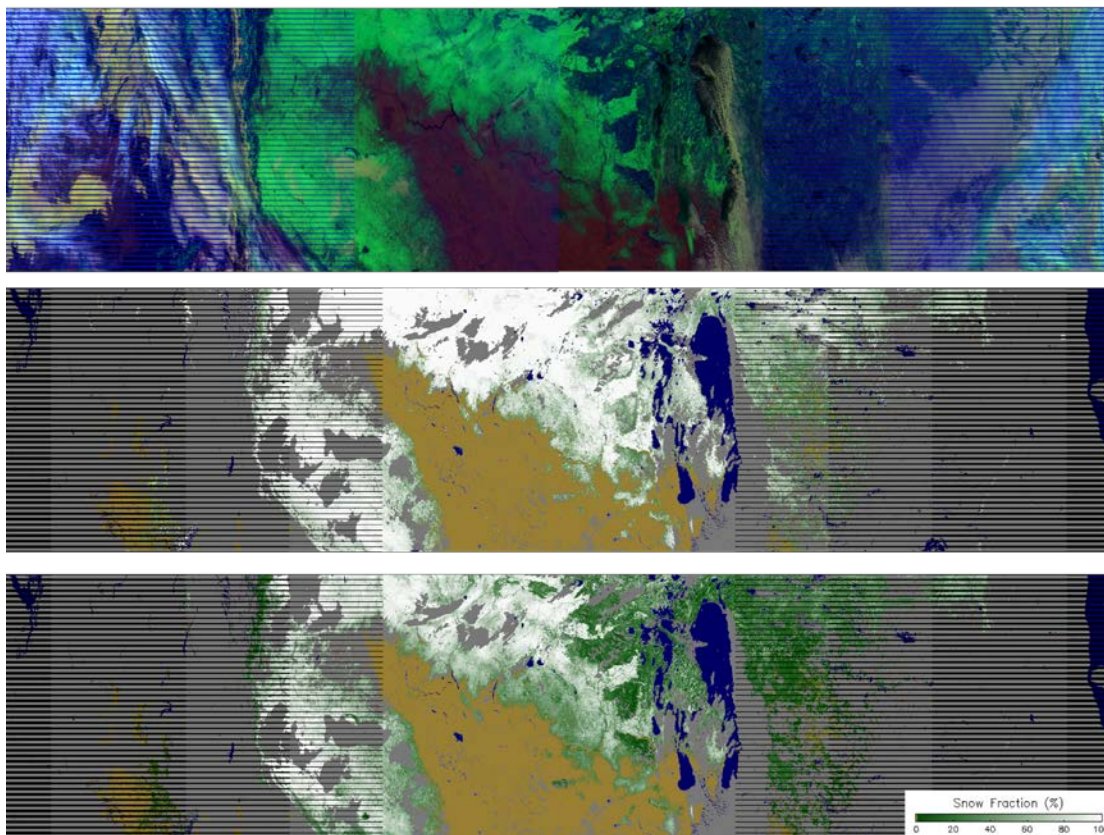


Figure 2-5– Example of VIIRS granule false color images (upper), NDSI-based snow cover fraction (middle) and reflectance-based snow cover fraction (lower). November 11, 2013

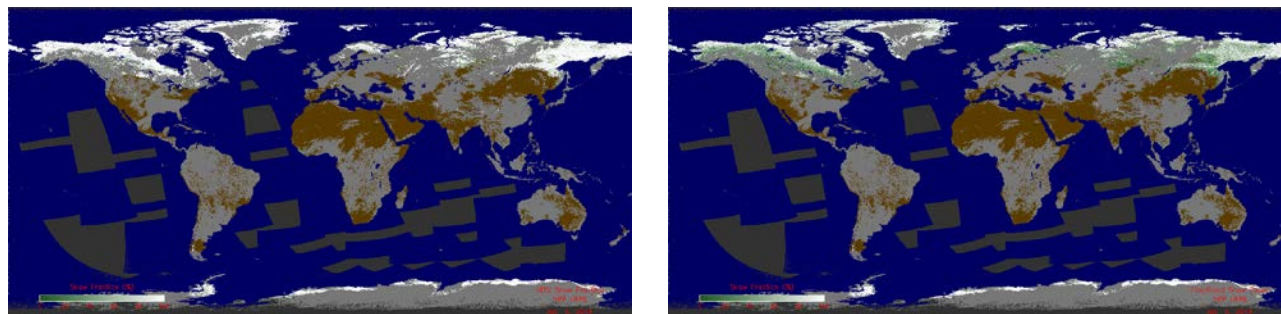


Figure 2-6– Example of global gridded maps of NDSI-based snow fraction (left) and reflectance-based snow fraction (right) .

2.5. Performance Estimates

2.5.1. Test Data Description

Description of data sets used for V&V, including unit tests and system test, either explicitly or by reference to the developer's test plans, if available. This will be updated during operations to describe test data for maintenance. (*Document Object 31*)

Writers: Development Testers

2.5.2. Sensor Effects

Any sub-optimal performance of the VIIRS sensors may cause degradation of the quality of the VIIRS snow fraction retrievals. This concerns, first the VIIRS sensors in bands I1 and I3 which are directly used to estimate the fractional snow cover. It is important however that the VIIRS fractional snow cover product uses the VIIRS binary snow cover product whereas the latter incorporates the cloud mask provided in the VIIRS Cloud Mask product. Therefore the excessive noise or inadequate calibration of sensors involved in the production of these two input products may adversely affect the accuracy of the VIIRS Fractional Snow Cover Map product.

Some geophysical phenomena causing a substantially reduced atmospheric transmittance in bands I1 and I3 (e.g., smoke from fires or dust from volcanic eruptions) will also adversely affect snow fraction retrievals. These phenomena can cause underestimate of the snow fraction as well as its overestimate depending on a particular scene, the fraction of snow on the ground and observations geometry.

2.5.3. Retrieval Errors

Direct quantitative estimation of the accuracy of satellite-based snow fraction retrievals is hardly possible. The snow fraction is a remotely sensed radiance-based parameter and observations of the snow fraction are not routinely performed on the ground. Visual estimates of the fraction of the ground surface are sometime included in snow surveys, but these measurements are performed at 10-, 14- days or one month time interval mostly during the snow melt period at selected meteorological stations. They are not included in standard SYNOP-FM12 WMO reports and are not transmitted through GTS. Moreover the snow fraction observed in situ is a true fraction of the land covered with snow and is thus principally different from the satellite-based viewable snow fraction which excludes snow cover masked by the vegetation. Therefore only theoretical estimates of the retrieval errors are only possible.

Theoretical error budget

Theoretically errors in the estimate of the reflectance-based snow cover fraction are determined by uncertainty in the observed and predicted top of the atmosphere (TOA) reflectances in the right side of equation (1). For the NDSI-based snow fraction estimation errors are, first due to uncertainty in the observed NDSI values and, second due to variable end-members NDSI values in Equation (5). Uncertainty in the NDSI value is determined by corresponding reflectance uncertainties in bands 1 and 3. Detailed theoretical error budget for the two snow fraction estimates is given in Tables 2-5 and 2-6.

In the estimates presented in Tables 2-5 and 2-6 it was assumed that the uncertainty in the observed reflectance is due to the calibration uncertainty and variable atmospheric transmittance. The uncertainty of the visible reflectance of snow and snow-free land surface in the reflectance-based snow fraction included the effect of the natural spatial variability of the land surface reflectance and residual errors of the reflectance anisotropical correction. Since the NDSI-based snow fraction algorithm implicitly assumes fixed NDSI values for the snow-free land surface and for snow, the snow fraction retrieval errors incorporate the effect of both natural variability of the reflectances of snow and of the snow-free land and the reflectance anisotropy inherent to these surface cover types in both visible and shortwave infrared spectral bands. As it follows from Table 2-6 the largest contribution to the uncertainty of the NDSI-based snow fraction results from the uncertainty in the reflective properties of the snow-free land surface. It causes corresponding uncertainty of up to 0.35 in the NDSI of the snow-free land surface. It should be noted that overall uncertainty levels the NDSI-based snow fraction may be overestimated since in the calculations we assumed that variations in the visible and shortwave infrared reflectance are independent, whereas in fact these values may be related.

Table 2-5- Factors contributing to the uncertainty of the derived reflectance-based snow fraction.

Factor	Affected Reflectance	Assumed uncertainty	Estimated uncertainty in the derived snow fraction
Visible reflectance measurement noise and calibration error	Observed Band I1 reflectance	0.005	0.006
Variable atmospheric composition	Observed Band I1 reflectance	0.1	0.11
Variable reflective properties of the snow-free land surface in band I1	Snow-free land visible reflectance (R_{land})	0.1	0 to 0.11
Variable reflective	Snow visible	0.05	0 to 0.06

properties of snow	reflectance (R_{snow})		
Residual uncertainty of snow reflectance due to angular anisotropy	Snow visible reflectance (R_{snow})	0.03	0 to 0.04
Residual uncertainty of snow-free land reflectance due to angular anisotropy	Snow-free land visible reflectance (R_{land})	0.03	0 to 0.04
All factors combined			0.13 to 0.18

Table 2-6 - Factors contributing to the NDSI-based snow fraction uncertainty

Factor	Affected reflectance	Assumed uncertainty	Affected NDSI parameter	Estimated effect on NDSI	Estimated uncertainty in the derived NDSI-based snow fraction
Visible reflectance measurement noise and calibration error	Observed Band I1 reflectance	0.005	Observed NDSI	0.0005 to 0.02	0 to 0.03
Shortwave Infrared reflectance measurement noise and calibration error	Observed Band I3 reflectance	0.005	Observed NDSI	0.0005 to 0.02	0 to 0.03
Variable atmospheric composition	Observed Band I1 reflectance	0.05	Observed NDSI	0.005 to 0.2	0.01 to 0.3
Variable atmospheric composition	Observed Band I3 reflectance	0.01	Observed NDSI	0.02 to 0.05	0.03 to 0.07
Variable reflective properties of the snow-free land surface in band I1 (spatial and angular)	Snow-free land visible reflectance (R_{land})	0.08	NDSI_{land}	0.20 to 0.23	0.27 to 0.35
Variable reflective properties of snow in band I1	Snow visible reflectance (R_{snow})	0.1	NDSI_{snow}	0.01	0.01

(spatial and angular)					
Variable reflective properties of the snow-free land surface in band I3 (spatial and angular)	Snow-free land shortwave infrared reflectance (R_{land})	0.08	$NDSI_{land}$	0.11 to 0.23	0.17 to 0.35
Variable reflective properties of snow in band I3 (spatial and angular)	Snow shortwave infrared reflectance (R_{snow})	0.05	$NDSI_{snow}$	0.1	0.12
All factors combined					0.33 to 0.40

2.6. Practical Considerations

2.6.1. Numerical Computation Considerations

Both snow fraction algorithms are simple from the mathematical standpoint . They are not computationally intensive as they do not involve iterations complex physical models or inversion of large matrices. Both algorithms are applied on a pixel by pixel basis and do not require the analysis of a spatial structure of the spectral response of larger scenes.

2.6.2. Programming and Procedural Considerations

None

2.6.3. Quality Assessment and Diagnostics

The quality of the VIIRS snow fraction retrievals will be estimated two ways, first through a series of consistency test and, second through comparison of sub-pixel snow fraction retrievals with snow fraction derived from higher spatial resolution satellite data

Consistency Tests

To indirectly assess the validity of the snow fraction product we will evaluate the realism of spatio-temporal variations of the derived snow fraction and examine the product consistency with other satellite observations and independent environmental datasets. Several tests will be applied to assess consistency of the derived snow cover fraction. The derived snow fraction will be examined for self consistency and will be compared with the forest cover distribution and snow depth observations.

Temporal changes of the fractional snow cover occur predominantly due to snow-falls and to the snow melt. Without these events the spatial pattern of the snow fraction should not much from one day to another. Within the self-consistency test we will compare snow fraction products on two consecutive days and examine correlation and the absolute difference between the retrieved values. We will also compare snow fraction retrievals at a different time lag. It is expected that the day-to-day autocorrelation of the snow fraction retrievals should be strongly positive, above 0.5 and the differences in the derived snow fraction values should generally be within the specified accuracy requirements for the snow fraction. Correlation is expected to decrease with the increasing time lag.

Forests present the major factor controlling the spatial distribution of the viewable snow fraction. Masking of snow cover on the forest floor by the vegetation canopy causes a substantial reduction in the viewable snow fraction. Within this test we will compare the derived daily snow fraction with available information on the forest cover distribution. It is expected that the snow fraction will exhibit a strongly negative correlation with the forest cover fraction. An example of time series of daily correlation between the fractional snow cover and the forest cover fraction for two snow fraction products is given in Figure 2-7. Our preliminary analysis shows that the reflectance-based snow fraction exhibits a stronger negative correlation with the forest fraction than the snow fraction derived with the NDSI-based algorithm.

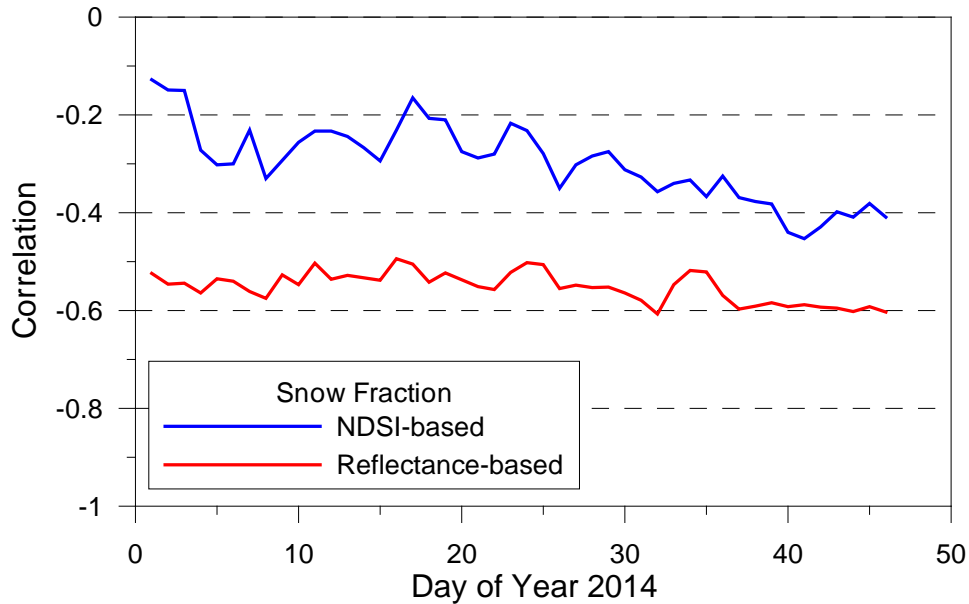


Figure 2-7– Time series of correlation between the snow fraction and forest fraction distribution for two snow fraction products, NDSI-based and reflectance-based.

Over flat non-forested areas the primary factor determining the viewable snow fraction is the snow depth. Therefore the derived snow fraction should increased with increasing snow depth and vice versa. Within this test we will match satellite-derived snow fraction retrievals and the results of snow depth observed in situ. It is expected that the correlation between the two parameters should be positive. Lack of correlation or negative correlations may be indicative of the problems in the algorithm or the input data. For the analysis we will use observations over US Great Plains and Canadian prairies.

Figure 2-8 presents time series of daily correlation between the snow depth and the snow fraction for two snow fraction products in January and February 2014. The correlation of the two products with the snow depth is not very strong but still positive ranging from 0.1 to 0.6. The same analysis will be conducted daily involving snow fraction retrievals from JPSS VIIRS.

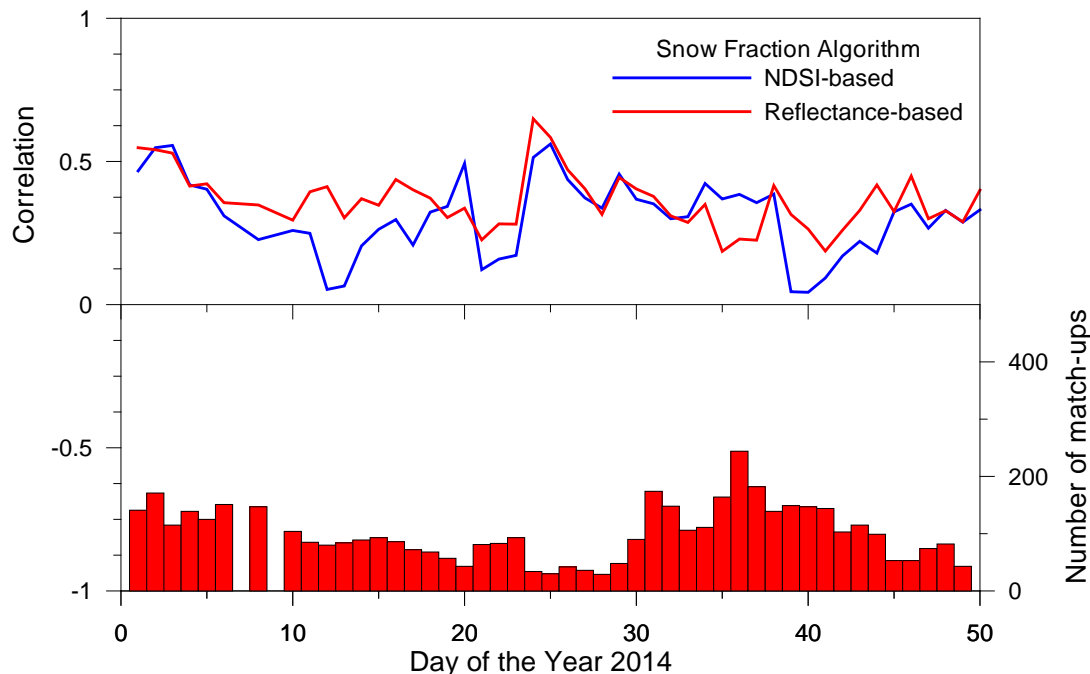


Figure 2-8– Time series of correlation between the snow fraction and in situ observed snow depth over US Great Plains and Canadian Prairies in January and February 2014.

Comparison with finer spatial resolution satellite observations

In a number of studies a surrogate approach to validate the satellite derived snow fraction has been applied where the snow fraction within the satellite field of view was estimated from finer spatial resolution observations with another but similar satellite sensor. In particular, Salomonson and Appel (2004), Painter et al (2009) and Rittger (2013) used binary snow retrievals with Landsat TM observations to validate the snow fraction derived from MODIS data. The weakness of this approach however results from the fact that both sensors have similar spectral bands which are used for snow identification and that snow identification with both sensors data is typically performed with the same algorithm. Moreover, the principal assumption of this approach that there are no “mixed” or partially snow-covered pixels at the fine spatial resolution can hardly be ever satisfied unless the coarser resolution grid cell is completely snow-free or completely snow-covered.

The results of the quality assessment will be documented and posted at a dedicated web site. Anomalies of the product performance will be timely identified, reported, analyzed and conclusions of the source of anomalies and possible remedies will be made.

2.6.4. Exception Handling

The developed software is designed to handle a wide variety of processing problems, including bad and missing data and fatal errors. In the event that processing problems prevent the production of useful snow fraction retrievals, error flag will be written to the output product file as metadata.

2.7. Validation

Validation of the algorithm and the product will be performed according to the schedule proposed in the Calibration/Validation Plan for Fractional Snow Cover Product (JPSS, 2015) and will include the following Beta, Provisional and Validated maturity levels.

3. ASSUMPTIONS AND LIMITATIONS

3.1. Performance Assumptions

It is assumed that cloud masking and snow cover identification is accurate. Pixels erroneously identified as snow covered by the binary snow cover algorithm will be assigned a non-zero snow fraction value.

The two algorithms incorporated in the snow fraction product utilize principally different assumptions with respect to the relationship of the snow fraction to the spectral response of the scene. The reflectance-based algorithm assumes that the snow fraction is linearly related to the visible reflectance. This assumption is physically natural, it is implicitly used when visually estimating the fractional snow cover over the land surface and is also applied in a large number of land surface models. The NDSI-based algorithm assumes a linear relationship of the NDSI to the snow fraction. The validity of this latter assumption is less obvious from the physical stand point. Although the NDSI index is sensitive to the presence of snow, the established linear relationship between the snow fraction and NDSI is based on the correlative analysis of two satellite datasets at two different spatial resolution and does not involve any in situ measurements or observations.

There are other assumptions in both algorithms generating the snow fraction products. Some of them are inherent to both algorithms and some are algorithm specific.

The two algorithms implement a two-endmembers one band linear unmixture technique to derive the snow fraction. The end-members characterize a completely snow-free and completely snow-covered land surface. In both cases the snow-free land surface end-member does not account for possible variability of reflective properties of the land surface due to different land cover types. Possible variability in the reflective properties of snow is also not accounted for. While the reflectance-based algorithm corrects the reflectances for the angular anisotropy, the NDSI-based algorithm assumes NDSI independent on the observation geometry. All these assumptions cause uncertainty in the snow fraction estimates which are discussed in detail in Section 2.5.3.

Angular anisotropy inherent both to reflectance and NDSI of the land surface and snow as well as atmospheric effects increase with increasing solar and satellite zenith angles. As a result, the accuracy of snow fraction retrievals when both angles are large may degrade.

3.2. Potential Improvements

Implemented snow fraction algorithms can be generally improved in a number of ways. First characterization of the reflectance angular anisotropy may be improved by introducing a more sophisticated physically-based model. Corrections accounting for the angular anisotropy of NDSI will improve NDSI-based snow fraction retrievals. Further improvement may be achieved by introducing location-dependent snow-free land endmember characterization. This will bring the largest improvement to the NDSI-based snow fraction algorithm where uncertainty in the snow-free land surface NDSI presents the largest contribution to the snow fraction error budget.

Adding more endmembers characterizing different surface cover types (.e.g., vegetated and non-vegetated) may also be beneficial for the snow fraction algorithm performance. Changing from two to multiple endmember unmixture algorithm however may make the retrievals less robust and add noise due to the spectral similarity of different end-members.

The principal improvement of the product would consist in estimating the true snow cover fraction on the ground along with the “viewable” snow fraction estimated with the developed technique. The latter however requires an accurate model to predict the masking effect of the forest cover or a spatially distributed dataset directly characterizing this forest cover property.

4. REFERENCES

Barton, J. S., Hall, D. K., and Riggs, G. A. (2001). Remote sensing of fractional snow cover using moderate resolution imaging spectroradiometer (MODIS) data. Proceedings of the 57th Eastern Snow Conference, May 17–19, 2000, Syracuse, NY , pp. 171–183.

JPSS (2015) Joint Polar Satellite System (JPSS) Calibration/Validation Plan for Fractional Snow Cover Product , Version 1.2 DRAFT, 29 p.

Metsämäki, S. J., Anttila, S. T., Markus, H. J., & Vepsäläinen, J. M. (2005). A feasible method for fractional snow cover mapping in boreal zone based on a reflectance model. *Remote Sensing of Environment*, 95, 77–95.

Nolin, A.W., Dozier, J. and Mertes, L., 1993. Mapping alpine snow using a spectral mixture modeling technique, *Ann. Glacier.*, 17, pp. 121-124.

Painter T.H. et al. (2009) Retrieval of subpixel snow covered area, grain size, and albedo from MODIS. *Remote Sensing of Environment* 113: 868-879.

Rittger, K., T. H. Painter, and J. Dozier (2013), Assessment of methods for mapping snow cover from MODIS, *Adv. Water Resour.*, 51, 367–380.

Romanov P., D. Tarpley, G. Gutman and T.Carroll (2003) Mapping and monitoring of the snow cover fraction over North America. *Journal of Geophysical Research*, D108, 8619, doi:10.1029/2002JD003142, 2003

Salomonson, Appel (2004) Estimating Fractional Snow Cover From MODIS Using the Normalized Difference Snow Index (NDSI). *Remote Sensing of the Environment* 89:351-360.

Vikhamar, D., and Solberg, R. (2003). Snow-cover mapping in forests by constrained linear spectral unmixing of MODIS data. *Remote Sensing of Environment*, 88(3), 309–323. doi:10.1016/j.rse.2003.06.004

Xin, Q., Woodcock, C. E., Liu, J., Tan, B., Melloh, R. a, & Davis, R. E. (2012). View angle effects on MODIS snow mapping in forests. *Remote Sensing of Environment*, 118, 50–59.